


HEAT SINK  
 MATERIAL : A 6063  
 FINISH : BLACK ANODIZE

MODEL	HEIGHT [h]	WEIGHT (grams)
N60-20B	20	57.0
N60-25B	25	62.5
N60-30B	30	68.0
N60-35B	35	73.5
N60-40B	40	79.0

Dimensions : mm

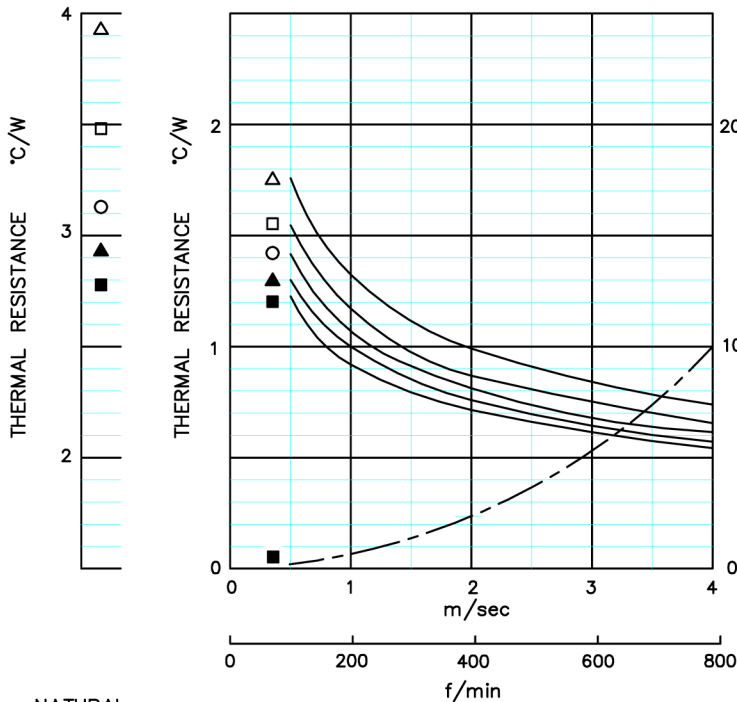


NATURAL CONVECTION

AIR VELOCITY: DUCTED CONDITION

- △ N60-20B
- N60-25B
- N60-30B
- ▲ N60-35B
- N60-40B

● DUCTED CONDITION  
 DUMMY HEATER SIZE: 12.7 SQ  
 THERMAL RESISTANCE ———  
 PRESURE DROP - - - -

● NATURAL CONVECTION  
 DUMMY HEATER SIZE: 12.7 SQ  
 DISSPATED POWER: 13.0(W)

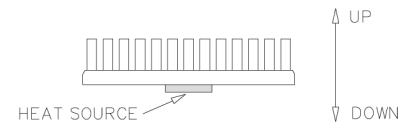

NOTE ORIENTATION OF HEAT SINK USED FOR NATURAL CONVECTION TESTING

■ BASED ON ALPHA'S STANDARD TEST PROCEDURE.  
 REFER TO TECHNICAL INFORMATION.